
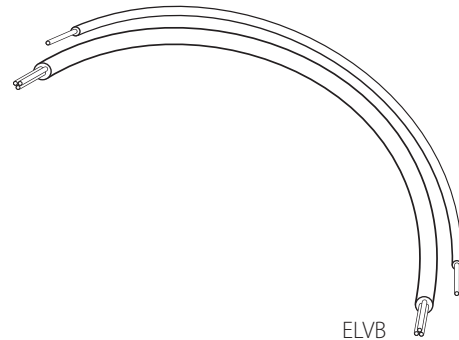


# Assembly Accessories

## Insulation Bushings, Cold Ends

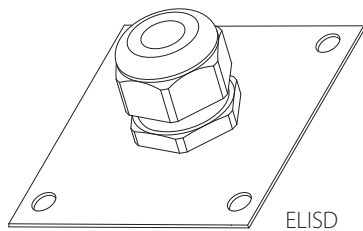

### Ordering Information

| Type       | Application                                                                                  | Item no. |
|------------|----------------------------------------------------------------------------------------------|----------|
| ELISD-1.12 | 1 x M12, cover plate (alum) 70 x 70 mm, seal area 3...6,5 mm (for connection cables only)    | 0921011  |
| ELISD-1.16 | 1 x M16, cover plate (alum) 70 x 70 mm, seal area 4.5...10 mm (for connection cables only)   | 0921015  |
| ELISD-1.20 | 1 x M20, cover plate (alum) 70 x 70 mm, seal area 7...13 mm (for connection cables only)     | 0921019  |
| ELISD-1.25 | 1 x M25, cover plate (alum) 70 x 70 mm, seal area 9...17mm (for connection cables only)      | 0921023  |
| ELISD-R1   | 1 x M25, cover plate (alum) 70 x 70 mm, oval seal for ELSR-N, -LS, -W, -SH                   | 0921035  |
| ELISD-R5   | 1 x M25, cover plate (alum) 70 x 70 mm, oval seal for ELSR-M, -R                             | 0921051  |
| ELISD-R4   | 1 x M25, cover plate (alum) 70 x 70 mm, oval seal for ELSR-H, -SHH                           | 0921047  |
| ELISD-P1   | 1 x M25, cover plate (alum) 70 x 70 mm, oval seal for ELP/PFA, (cold area)                   | 0921101  |
| ELISD-P2   | 2 x M25, cover plate (alum) 70 x 70 mm, suitable for ELP/Si                                  | 0921031  |
| ELISD-2.12 | 2 x M12, cover plate (alum) 100 x 40 mm, seal area 3...6,5 mm, (for connection cables only)  | 0921069  |
| ELISD-2.16 | 2 x M16, cover plate (alum) 100 x 40 mm, seal area 4.5...10 mm, (for connection cables only) | 0921071  |
| ELISD-3.12 | 3 x M12, cover plate (alum) 100 x 40 mm, seal area 3...6,5 mm, (for connection cables only)  | 0921067  |
| ELISD-3.16 | 3 x M16, cover plate (alum) 100 x 40 mm, seal area 4.5...10 mm, (for connection cables only) | 0921070  |

| Type             | Temperature-resistant cold ends                                                                     | Item no.   |
|------------------|-----------------------------------------------------------------------------------------------------|------------|
| ELVB-OT          | Hose line 3G1.5, fluoropolymer, stranded wires: grn./yel., brown, blue                              | 2255503016 |
| ELVB-OS          | Hose line 3G1.5, silicone, red, stranded wires: grn./yel., brown, blue                              | 2253330150 |
| ELVB-L01         | Ni-stranded wire 1.5 mm <sup>2</sup> , glass-insulated, max. Operating temp. 450 °C, briefly 550 °C | 2216301500 |
| ELVB-L02         | Ni-stranded wire 2.5 mm <sup>2</sup> , glass-insulated, max. Operating temp. 450 °C, briefly 550 °C | 2216302500 |
| ELKM-AG-L 0.0072 | Can be used as cold end 2.5 mm <sup>2</sup> to 32 A                                                 | 01TT007E   |
| ELKM-AG-L 0.0117 | Can be used as cold end 1.5 mm <sup>2</sup> to 24 A                                                 | 01TT011E   |
| ELKM-AG-N 0.0072 | Can be used as cold end 2.5 mm <sup>2</sup> to 32 A                                                 | 01TA007E   |
| ELKM-AG-N 0.0117 | Can be used as cold end 1.5 mm <sup>2</sup> to 24 A                                                 | 01TA011E   |

\* Additional cables and individual conductors are available on request.