


At a Glance

Applications



› ELP/PFA

Benefits

- › Heat shrink technology
- › Simple and quick assembly


Approvals



- › Classification
II 2G Ex eb IIC Gb
II 2D Ex tb IIIC Db
- › Certification
IBExU 07 ATEX 1022 X
IECEX IBE 12.0023 X

ELVB-ELPEX-25

ELP - Connection set

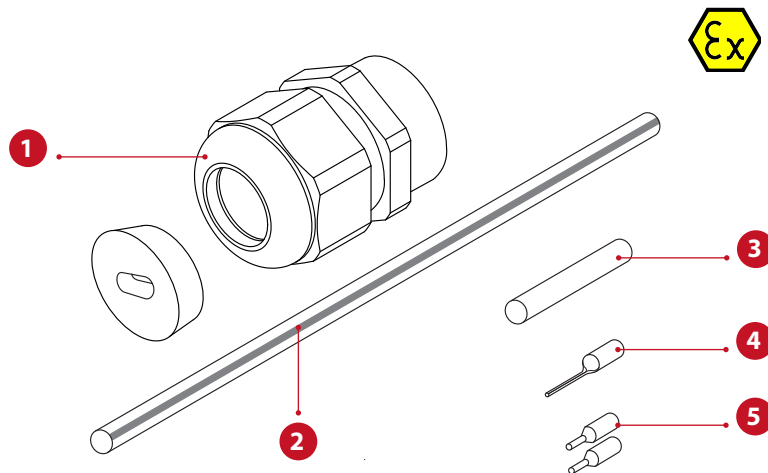

The connection technology is the perfect solution for simple and quick connection of the ELP heating cable to a suitable junction box.

Checklist

No.	Type	Quantity
1	M25 Ex-Cable gland; Polyamid; black; UNI flat seal	1 Pcs.
2	Heat shrink Ø = 4.8 mm; l = 180 mm; green / yellow	1 Pcs.
3	Silicone tube Ø = 4 mm; l = 30 mm; transparent	1 Pcs.
4	Pin terminal lug 1.5-2.5 mm ² ; E-Cu galvanic tinned	1 Pcs.
5	Ferrules 1.5 mm ² ; black	2 Pcs.

Technical information

Operation temperature	-55 °C up to -25 °C (4 Joule) -25 °C up to +70 °C (7 Joule)
Protection class according EN 60529	IP 65
UV - Resistant	Yes

Order information

Type	Article - No.
ELVB-ELPEX-25	0X81PA2