


At a Glance

Applications



› ELKM-AG-Ex (PFA insulated)

Benefits


- › Heat shrink technology
- › Simple and quick assembly

Approvals



- › Classification
 - II 2 G Ex 60079-30-1 IIC
 - T6...T2 Gb Ta = -60°C to +60°C
 - II 2 D Ex 60079-30-1 IIIC
 - T85°C...T300°C Db
 - Ta = -60°C to +60°C
- › Certification
 - FM 16 ATEX 0037 X

ELVB-AG-Ex ELKM-AG Splice kit

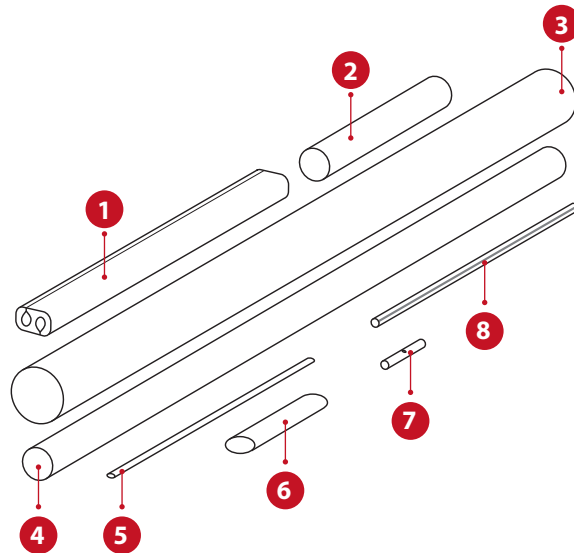

Checklist

No.	Type	Quantity
1	Silicone Spacer for ELK-AG-NA	2 Pcs.
2	Silicone Heat shrink Ø = 10.0 mm; l = 50 mm	4 Pcs.
3	PTFE-FEP Heat shrink Ø = 17.8 mm; l = 220 mm; transparent	2 Pcs.
4	Silicone Heat shrink Ø = 13 mm; l = 230 mm; grey	2 Pcs.
5	PTFE Heat shrink Ø = 4.8 mm; l = 90 mm; transparent	2 Pcs.
6	PTFE-FEP Heat shrink Ø = 11.4 mm; l = 70 mm; transparent	4 Pcs.
7	1.5/2.5mm ² Nickel sleeve; l = 25 mm; Ø = 2.3mm	4 Pcs.
8	Heat shrink Ø = 4.8 mm; l = 90 mm; green / yellow	2 Pcs.

Technical information

Operation temperature	-60 °C up to +250 °C
Protection class according EN 60529	IP 68
UV - Resistant	Yes

Order information

Type	Article - No.
ELVB-AG-Ex Splice kit	0X81150