


At a Glance

Applications



- › ELP/PFA
- › ELP/FEP


Benefits

- › Heat shrink technology
- › Simple and quick assembly

Approvals

ELVB-ELPA1-25

ELP - Connection set

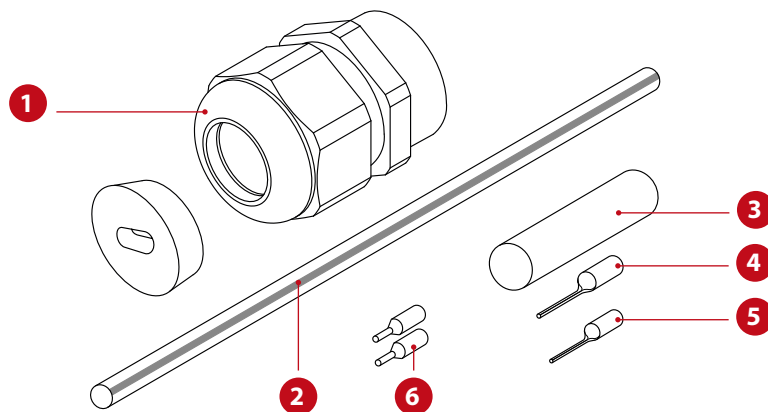

The connection technology is the perfect solution for simple and quick connection of the ELP heating cable to a suitable junction box.

Checklist

No.	Type	Quantity
1	Cable gland M25 x 1.5; Polyamid. grey. UNI flat seal	1 Pcs.
2	Heat shrink Ø = 3/16" (4.8 mm); l = 120 mm; green / yellow	1 Pcs.
3	Silicone tube Ø = 3/8" (9,5 mm); l= 35 mm; black	1 Pcs.
4	Pin terminal lug 4-6 mm ² ; E-Cu galvanic tinned	1 Pcs.
5	Pin terminal lug 1.5-2.5 mm ² ; E-Cu galvanic tinned	1 Pcs.
6	Ferrules 1.5 mm ² ; black	2 Pcs.

Technical information

Operation temperature	-25 °C up to +70 °C (7 Joule)
Protection class according EN 60529	IP 66
UV - Resistant	Yes

Order information

Type	Article - No.
ELVB-ELPA1-25	091A050