


At a Glance

Applications



› ELP/Si


Benefits

- › Heat shrink technology
- › Simple and quick assembly

Approvals

ELVB-ELPA2-25

ELP - Connection set

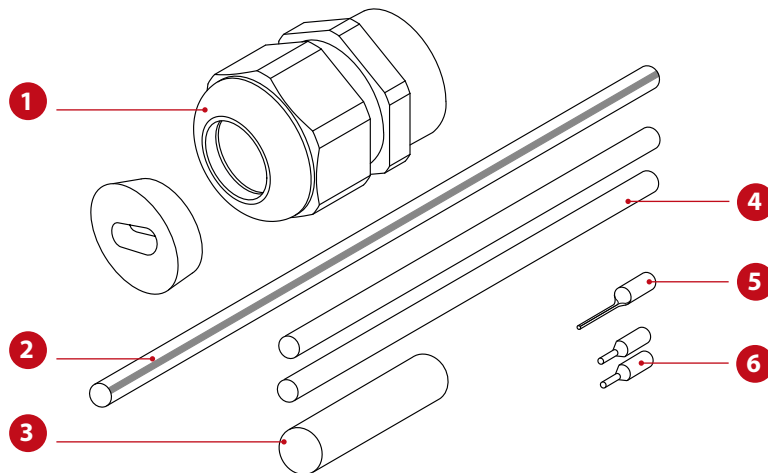

The connection technology is the perfect solution for simple and quick connection of the ELP heating cable to a suitable junction box.

Checklist

No.	Type	Quantity
1	Cable gland M25 x 1,5; Polyamid, UNI flat seal TPE	1 Pcs.
2	Heat shrink Ø = 3/16" (4,8 mm); l = 120 mm; green / yellow	1 Pcs.
3	Heat shrink Ø = 3/8" (9,5 mm); l = 35 mm, black	1 Pcs.
4	Heat shrink Ø = 1/8" (3,2 mm); l = 100 mm, black	2 Pcs.
5	Pin terminal lug 4-6 mm ² ; E-Cu electro tinned	1 Pcs.
6	Ferrules 1.5 mm ² ; blue	2 Pcs.

Technical information

Operation temperature	-25 °C up to +70 °C
Protection class according EN 60529	IP 66
UV - Resistant	Yes

Order information

Type	Article - No.
ELVB-ELPA2-25	091A052