


At a Glance

Applications



➤ ELSR-SH

Benefits

- Cold connection technology
- Simple and quick assembly


Approvals



- Classification
 - II 2G Ex db IIC Gb
 - II 1D Ex ta IIC Da
- Certification
 - CML 19 ATEX 1346 X
 - IECEX CML 19.0104 X

ELVB-SRASH-Ex-20

ELSR - Connection set

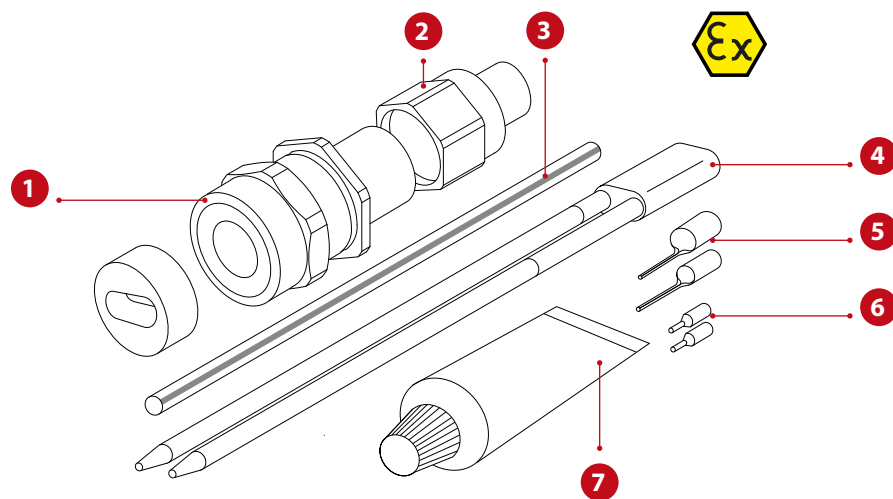

The Cold connection technology is the ideal solution for simple and quick connection of the ELSR heating cable to a suitable junction box.

Checklist

No.	Type	Quantity
1	M25 Ex d e cable gland; Brass, nickel plated, with UNI gasket	1 Pcs.
2	Adaptor M25 x M20; Brass, nickel plated	1 Pcs.
3	Heat shrink Ø = 3/16" (4,8 mm); 180 mm long; green/yellow	1 Pcs.
4	Isolator for ELSR-Connection; Silicone	1 Pcs.
5	Pin terminal 4-6 mm ² ; E-Cu galvanically tin-plated	1 Pcs.
	Pin terminal 1,5-2,5 mm ² ; E-Cu galvanically tin-plated	1 Pcs.
6	Wire end sleeves 1,5 mm ² ; black	2 Pcs.
7	Silicone glue; „ECH“ red, 5 gr	1 Pcs.

Technical Information

Operating temperature	-60 °C up to +180 °C (7 Joule)
Protection according EN 60529	IP 64*
UV-Resistance	Yes

*An IP washer can be ordered separately to achieve IP66/68 (50m 7 days) ingress protection rating.

Order information

Type	Art.-No.
ELVB-SRASH-Ex-20	0X81PSD
IP-washer, M25, PTFE, -200°C to +260°C	2578025000