


At a Glance

Applications



- › ELSR-N
- › ELSR-LS
- › ELSR-H
- › ELSR-SHH

Benefits

- › For the connection of ELSR to Ex-d housings


Approvals



- › Classification
 - II 2G Ex db IIC Gb
 - II 1D Ex ta IIC Da
- › Certification
 - CML 19 ATEX 1346 X
 - IECEX CML 19.0104 X

M20 Ex-d Cable gland

ELSR - Cable gland

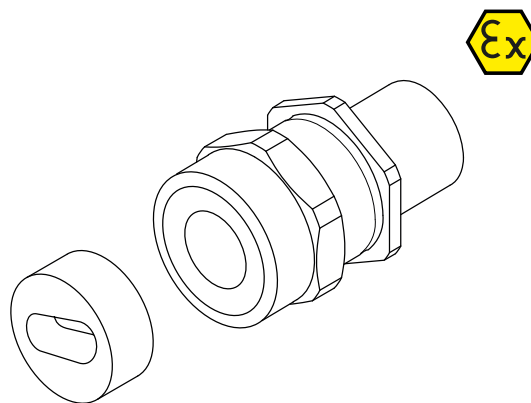

Technical Information

Operating temperature	-60 °C up to +180 °C (7 Joule)
Protection according EN 60529	IP 64*
UV-Resistance	Yes

*An IP washer can be ordered separately to achieve IP66/68 (50m 7 days) ingress protection rating.

Order information

Type	Art.-No.
M20 R Ms. Ex-d cable gland 5,8/6,2 x 8,1/13,5 mm	2572020003
IP-washer, M20, PTFE, -200°C to +260°C	2578020000