


At a Glance

Applications



- › ELSR-N
- › ELSR-LS
- › ELSR-W
- › ELSR-FHP
- › ELSR-H+
- › ELSR-SH
- › ELSR-SH+


Benefits

- › Cold connection technology
- › Simple and quick assembly

Approvals

ELVB-SRA-25

ELSR - Connection set

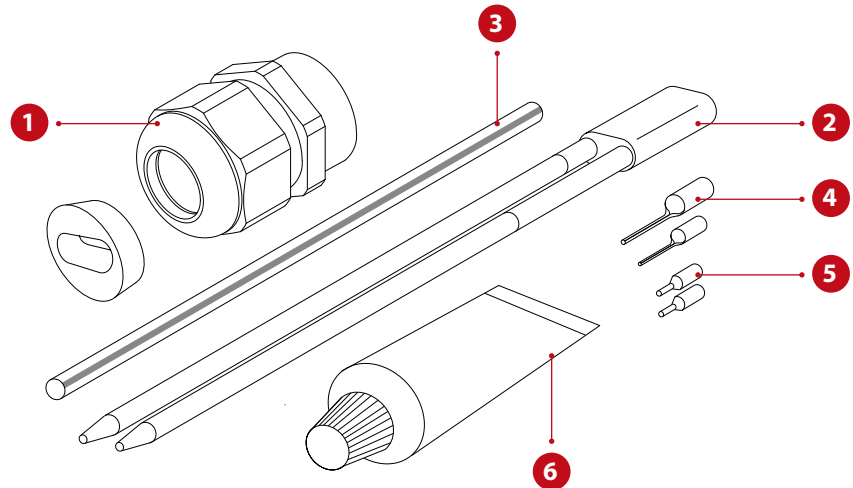

The cold connection technology is the ideal solution for simple and quick connection of the ELSR heating cable ELSR-N, -LS, -W, -FHP, -H+, -SH & -SH+ to a suitable junction box.

Checklist

No.	Type	Quantity
1	Cable gland incl. locknut M25 x 1,5	1 Pcs.
2	Insulator for ELSR connection	1 Pcs.
3	Shrink tubing Øi=1/16" (1.6 mm); 180 mm; gn/ye for ELSR with Aluminium foil (AO)	1 Pcs.
	Shrink tubing Øi=3/16" (4.8 mm); 180 mm; gn/ye for ELSR with braiding (BO)	1 Pcs.
4	Terminal pin 4-6 mm ² ; E-Cu electrogalvanised	1 Pcs.
5	Terminal pin 1.5-2.5 mm ² ; E-Cu electrogalv.	1 Pcs.
6	Wire end ferrules 1.5 mm ² ; black	2 Pcs.
7	Silicone adhesive; "EC" blue, 5 gr.	1 Pcs.

Technical information

Operation temperature	-40 °C up to +100 °C
Protection level	IP 65
UV - Resistant	Yes

Order information

Type	Art.-No.
ELVB-SRA-25	091A010