


At a Glance

Applications



- ELSR-M
- ELSR-R


Benefits

- Cold connection technology
- Simple and quick assembly

Approvals

ELVB-SRAM-25

ELSR - Connection set

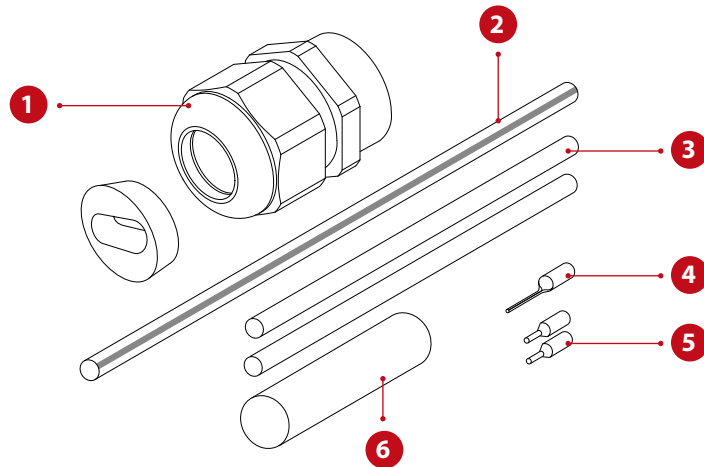

The cold connection technology is the ideal solution for simple and quick connection of the ELSR heating cable ELSR-M & -R to a suitable junction box.

Checklist

No.	Type	Quantity
1	Cable gland M25 x 1.5; polyamide, with UNI flat gasket TPE	1 Pcs.
2	Heat shrink Ø = 4.8 mm; l = 115 mm; green / yellow	1 Pcs.
3	Heat shrink Ø = 3.2 mm; l = 100 mm; black	2 Pcs.
4	Pin cable lug 1.5-2.5 mm ² ; E-Cu galvanically tin-plated	1 Pcs.
5	Ferrules 0.75 mm ² ; blue	2 Pcs.
6	Heat shrink Ø = 9.5 mm; l = 35 mm; black	1 Pcs.

Technical information

Operation temperature	-40 °C up to +100 °C
Protection level	IP 65
UV - Resistant	Yes

Order information

Type	Art.-No.
ELVB-SRAM-25	091A015