


At a Glance

Applications



- › ELSR-H
- › ELSR-SH
- › ELSR-SHH


Benefits

- › Cold connection technology
- › Simple and quick assembly

Approvals

ELVB-SRAH-25

ELSR - Connection set

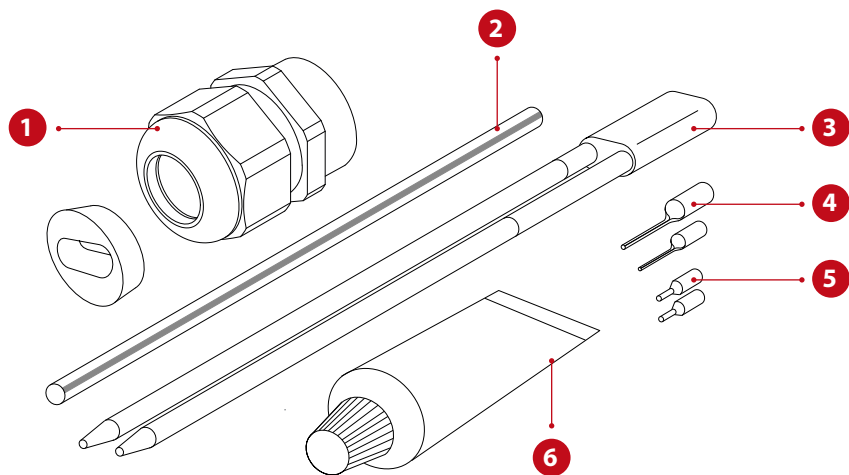

The cold connection technology is the ideal solution for simple and quick connection of the ELSR heating cables ELSR-H, ELSR-SH and ELSR-SHH to a suitable junction box.

Checklist

No.	Type	Quantity
1	Cable gland M25 x 1.5; polyamide, with UNI flat gasket TPE	1 Pcs.
2	Heat shrink Ø = 4.8 mm; l = 180 mm; green / yellow	1 Pcs.
3	Insulator for ELSR-Connection	1 Pcs.
4	Pin cable lug 4-6 mm ² ; E-Cu galvanically tin-plated	1 Pcs.
	Pin cable lug 1.5-2.5 mm ² ; E-Cu galvanically tin-plated	1 Pcs.
5	Ferrules 1.5 mm ² ; black	2 Pcs.
6	Silicone glue; „ECH“ red, 5 gr.	1 Pcs.

Technical information

Operation temperature	-40 °C up to +100 °C
Protection level	IP 65
UV - Resistant	Yes

Order information

Type	Art.-No.
ELVB-SRAH-25	091A040