


At a Glance

Applications



- › ELSR-N
- › ELSR-LS
- › ELSR-H
- › ELSR-H+
- › ELSR-SH
- › ELSR-SH+
- › ELSR-SHH


Benefits

- › Cold connection technology
- › Simple and quick assembly

Approvals

ELVB-SREx-IT

ELSR - Connection set

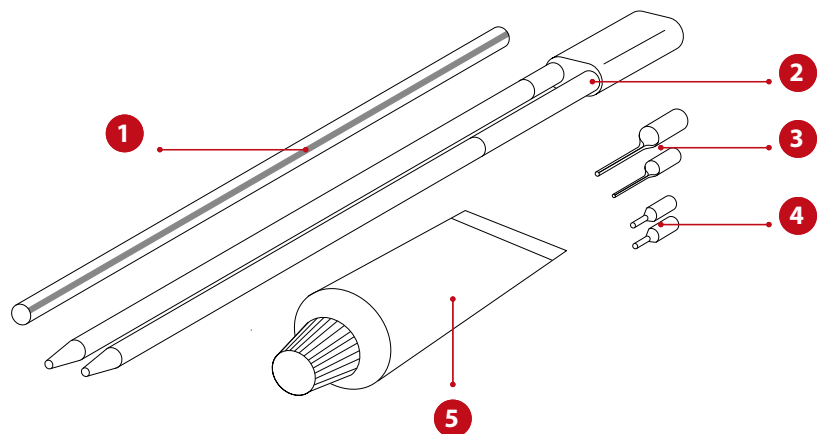

The cold connection technology is the ideal solution for simple and quick connection of the ELSR heating cable to the junction box with mounting stand Ex-It.

Checklist

No.	Type	Quantity
1	Heat shrink Ø = 3/16" (4.8 mm); 180 mm long; green/yellow	1 Pcs.
2	Isolator for ELSR-Connection	1 Pcs.
3	Pin terminal 4-6 mm ² ; E-Cu galvanically tin-plated	1 Pcs.
	Pin terminal 1.5-2.5 mm ² ; E-Cu galvanically tin-plated	1 Pcs.
4	Wire end sleeves 1.5 mm ² ; black	2 Pcs.
5	Silicon glue; „EC“ blue, 5 gr.	1 Pcs.

Technical Information

Operation temperature	- 60 °C up to + 70 °C
Protection level	IP 65

Order information

Typee	Art.-No.
ELVB-SREx-It	091AIT1