


At a Glance

Applications



- › ELSR-N (EL-ECN)
- › ELSR-FHP (EL-ECN)
- › ELSR-LS (EL-ECL)
- › ELSR-M (EL-ECM & EL-ECMF)
- › ELSR-RAMP (EL-ECRA)
- › ELSR-W (EL-ECW)
- › ELSR-R (EL-ECM)


Benefits

- › "Cold" Connection technology
- › Easy and simple installation

Approvals

EL-EC ELSR - Termination sets

The ELVB end termination set is the ideal solution for quick and easy termination of an ELSR heating circuit.

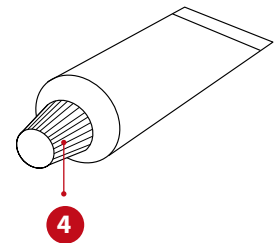


Technical Information

Operating temperature:	-45 °C up to +85 °C (+100 °C EL-ECW)
UV-Resistance	Yes


Checklist

No.	Type EL-ECN	Quantity
1	Termination cap EL-ECN, Silicone, transparent	1 Pcs.
4	Silicone glue; „EC“ blue, 5 gr.	1 Pcs.
No.	Type EL-ECL	Quantity
2	Termination cap EL-ECL, Silicone, transparent	1 Pcs.
4	Silicone glue; „EC“ blue, 5 gr.	1 Pcs.
No.	Type EL-ECW	Quantity
3	Termination cap EL-ECW, Silicone, transparent	1 Pcs.
4	Silicone glue; „EC“ blue, 5 gr.	1 Pcs.

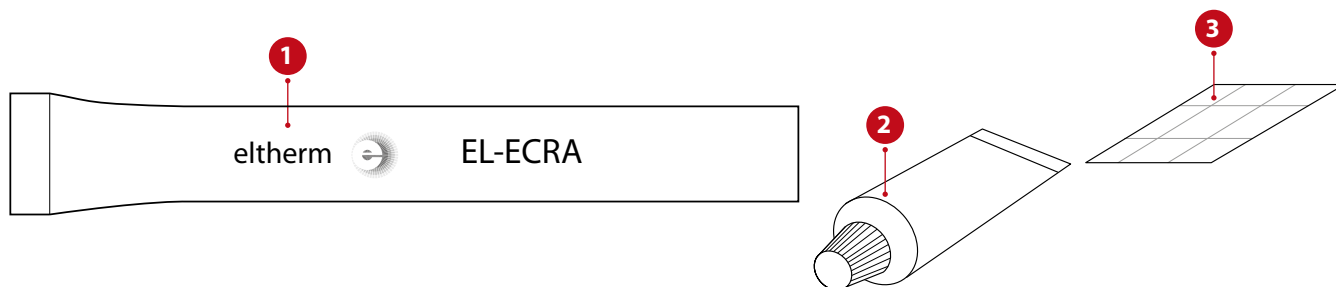

Checklist

No.	Type EL-ECRA	Quantity
1	Termination cap EL-ECRA, Silicone, transparent	1 Pcs.
2	Silicone glue; „EC“ blue, 5 gr.	1 Pcs.
3	Sealing tape; 35 x 35 mm	1 Pcs.

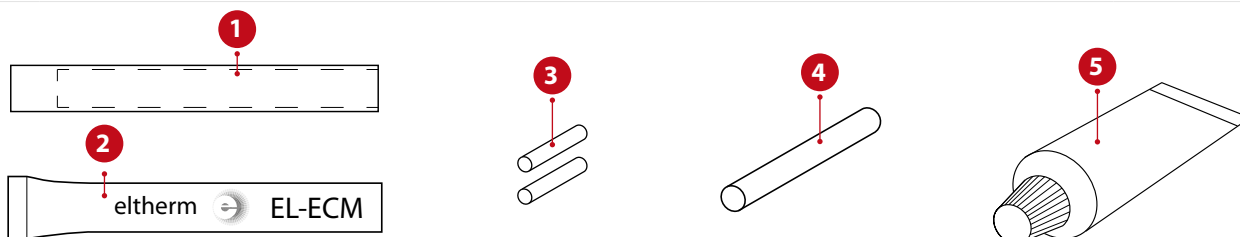

Checklist

No.	Type EL-ECMF	Quantity
1	Termination cap EL-ECMF, Silicone, transparent, suitable for drinking water	1 Pcs.
3	Nickel-sleeve 3.2 x 0.4 x 9.0 mm; blank	2 Pcs.
4	Heat shrink Ø = 3.0 mm; black	1 Pcs.
5	Silicone glue; „EC“ blue, 5 gr.	1 Pcs.
No.	Type EL-ECM	Quantity
2	Termination cap EL-ECM, Silicone, transparent	1 Pcs.
3	Nickel-sleeve 3.2 x 0.4 x 9.0 mm; blank	2 Pcs.
4	Heat shrink Ø = 3.0 mm; black	1 Pcs.
5	Silicone glue; „EC“ blue, 5 gr.	1 Pcs.

Order information

Type	Art.-No.
EL-ECN	09112N1
EL-ECL	09112L1
EL-ECM	09112M1
EL-ECW	09112W1
EL-ECRA	09112RA
EL-ECMF	09112MF