


At a Glance

Applications



- › ELSR-H (Repair/connection)
- › ELSR-H+ (Repair/connection)
- › ELSR-SH (Repair/connection)
- › ELSR-SH+ (Repair/connection)
- › ELSR-SHH (Repair/connection)
- › Connection cable Silicon e.g. ÖLFLEX® HEAT 180 SiHF


Benefits

- › Cold connection technology
- › Simple and quick assembly

Approvals

ELVB-SRV-H

ELSR - Repair- & connection set

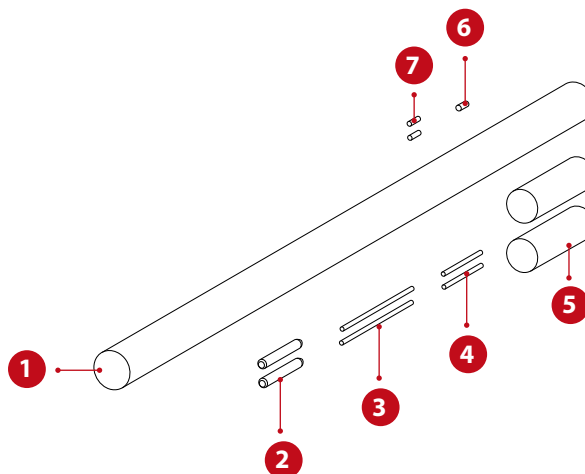

The ELSR connection technology is the ideal solution for simple, quick and easy repair / connection of the ELSR heating cables as well as for connection to a cold cable.

Checklist

No.	Type	Quantity
1	Heat shrink PTFE-FEP Ø = 11.4 mm; l = 200 mm; natur	1 Pcs.
2	Heat shrink PTFE-FEP Ø = 4 mm; l = 32 mm; natur	2 Pcs.
3	Heat shrink PTFE Ø = 3,2mm; l = 70 mm; natur	2 Pcs.
4	Heat shrink PTFE Ø = 3,2mm; l = 40 mm; natur	2 Pcs.
5	Heat shrink PTFE-FEP Ø = 8.9 mm; l = 30 mm; natur	2 Pcs.
6	Nickel-sleeve 4.8 x 0.4 x 9.0 mm; blank	1 Pcs.
7	Nickel-sleeve 4.0 x 0.4 x 9.0 mm; blank	2 Pcs.

Order information

Type	Art.-No.
ELVB-SRV-H	0911117