

At a Glance

Applications



ELSR-
Heating cables



Mounting
accessories




ELP-
Heating cables

Advantages

- › Silicone-free
- › Cadmium-free
- › Phosphorus-free
- › Easy to install
- › Waterproof, dustproof

ELISD Type R

Insulation bushing

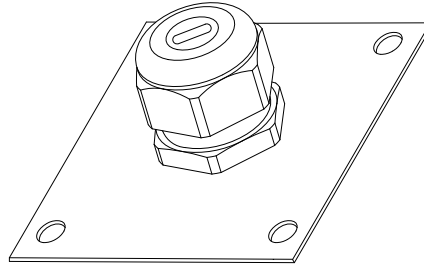

Technical Information

Version:	1-fold bushing
Operating temperature:	-20 °C up to +100 °C
Protection class:	IP 65
Colour:	Light gray; RAL 7035
Material bushing:	Polyamide
Material sealing ring:	TPE-S
Material base plate:	Aluminium
Dimension base plate:	70 x 70 x 0.5 mm
Hole pattern base plate:	60 x 60 mm; 4 x Ø 5 mm

Variants

Type:	ELISD-R1	ELISD-R4	ELISD-R5
Size:	M25 x 1.5	M25 x 1.5	M25 x 1.5
ELSR-Version:	-N, -LS, -W, -FHP, -H+, -SH+	-H, -SHH	-M, -R
ELP-Version:			-PFA, -FEP
Width across flats bushing:	AF 29	AF 27, AF 30	AF 27, AF 30
Width across flats counter nut:	AF 32	AF 32	AF 32

Ordering Information

Type	Description	Item No.
ELISD-R1	Insulation bushing M25 x 1.5 for ELSR-N, -LS, -W, -FHP, -H+, -SH+; 1-fold	0921035
ELISD-R4	Insulation bushing M25 x 1.5 for ELSR-H, -SHH; 1-fold	0921047
ELISD-R5	Insulation bushing M25 x 1.5 for ELSR-M, -R; 1-fold	0921101