eltherm®

At a Glance

Applications

Frost protection

Temperature maintenance

Pipelines

Silos, containers, tanks

Advantages

- High mechanical strength
- Intensiv adhesive
- Flame ratardant
- Resitant to ageign

ELB-02A & 02B

Fibreglass adhesive tape

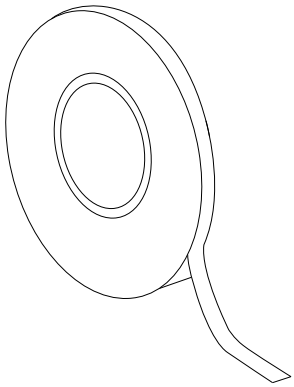

Technical Information

Carrier:	Glass fabric, flame retardant
Adhesive type:	Silicone rubber adhesive, suitable for impregnants
Operating temperature:	-73 °C up to 260 °C
Band width:	12 mm
Band thickness:	0,2 mm
Length per roll:	30 m (ELB-02A) 50 m (ELB-02B)
Tearing force:	480 N
Elongation at break:	5 %
Breackdown votlage:	2,5 kV
Insulation class:	H
Insulation class temperature:	180 °C

Ordering Information

Type	Description	Item No.
ELB-02A	Fibreglass adhesive tape 30 m x 12 mm	2486800126
ELB-02B	Fibreglass adhesive tape 50 m x 12 mm	2486800130

8643022486 80X data sheet ELB-02 EN - subject to technical changes without notice.

Contact us: +49 2736 4413-0 • info@eltherm.com