


At a Glance

Applications



- ELSR-NA
- ELSR-HA

Benefits

- Cold connection technology
- Simple and quick assembly


Approvals



- Classification
 - Class I Zone 1, AEx 60079-30-1
 - IIC Gb / Ex 60079-30-1 IIC Gb
 - Class I Div 2 Grp A,B,C,D
 - Class II Div 1 Grp E,F,G
 - Class III Div 1
- Certification
 - FM 22CA 0044X
 - FM 22US 0062X
 - CSA C US 2547790

ELVB-SREx-3/4" BR HT

ELSR - Connection set

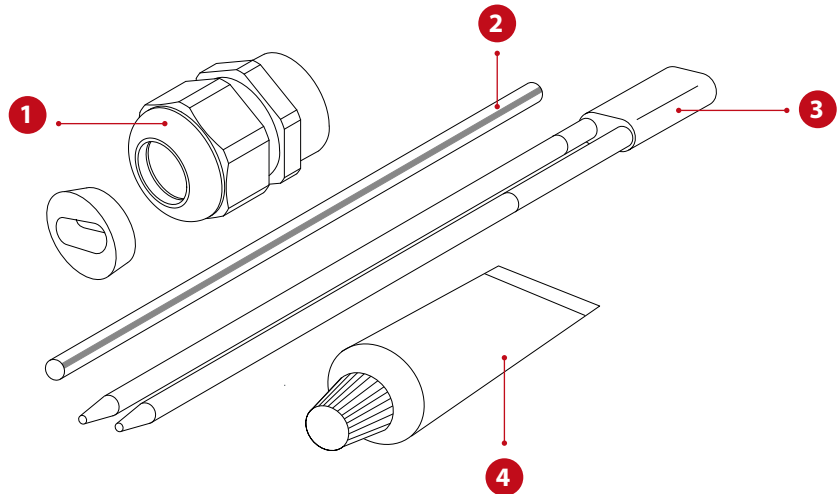

The Cold connection technology is the ideal solution for simple and quick connection of the ELSR heating cable to a suitable junction box.

Checklist

No.	Type	Quantity
1	Cable gland 3/4" NPT, nickel plated; Ex d e	1 Pcs.
2	Heat shrink Ø = 3/16" (4,8 mm), 7,08" (180 mm) long; green/yellow	1 Pcs.
3	Isolator for ELSR-Connection; Silicone	1 Pcs.
4	Silicone glue; „EC" blue, 5 gr	1 Pcs.

Technical Information

Nominal voltage	max. 277 VAC
Nominal power	max. 20 W/ft
Nominal current	max. 40 A
Min. installation temperature	- 60 °C (- 76 °F)
Max. operation temperature	+ 180 °C (+ 356 °F)

Ordering Information

Type	Item No.
ELVB-SREx-3/4" BR HT	09CA017