


At a Glance

Applications



› ELSR-NA

Benefits

- › Cold connection technology
- › Simple and quick assembly


Approvals



- › Classification
 - Class I Div 2 Grp A,B,C,D
 - Class II Div 2 Grp E,F,G /
 - Class III Div 1
 - Zone1, AEx 60079-30-1 IIC Gb /
 - Ex 60079-30-1 IIC Gb
- › Certification
 - FM 22CA 0044X
 - FM 22US 0062X

EL-ECN-Ex

ELSR - End termination-Set

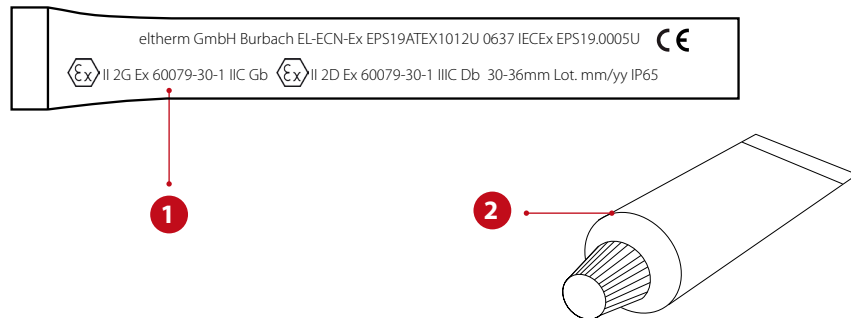

The End termination is the ideal complement to the eltherm Cold connection sets.

Checklist

No.	Type	Quantity
1	Termination cap EL-ECN, Silicone, black	1 Pcs.
2	Silicone glue; „ECH“ blue, 5 gr.	1 Pcs.

Technical Information

Nominal voltage	max. 277 V
Nominal power	max. 20 W/ft
Nominal current	max. 40 A
Min. installation temperature	-76 °F (-60 °C)
Max. operation temperature	+194 °F (+90 °C)

Ordering information

Type	Item.-No.
EL-ECN-Ex	09CA022