


At a Glance

Applications



- › ELSR-HA
- › ELSR-SH+

Benefits

- › Cold connection technology
- › Simple and quick assembly


Approvals



- › Classification
Class I Zone1, AEx 60079-30-1 IIC
Gb / Ex 60079-30-1 IIC Gb
Class I Div 2 Grp A,B,C,D
Class II Div 1 Grp E,F,G /
Class III Div 1
- › Certification
FM 22CA 0044X
FM 24CA 0020X
FM 22US 0062X
FM 24UC 0046X
CSA C US 2547790

EL-ECSH-Ex

ELSR - End termination-Set

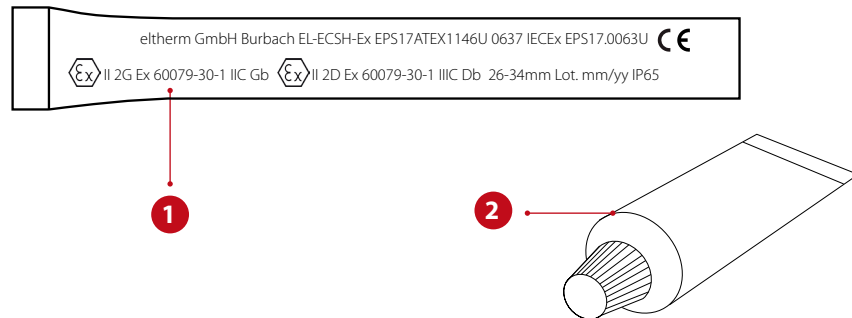

The End termination is the ideal complement to the eltherm Cold connection sets.

Checklist

No.	Type	Quantity
1	Termination cap EL-ECSH, Silicone, red	1 Pcs.
2	Silicone glue; „ECH“ red, 5 gr	1 Pcs.

Technical Information

Nominal voltage	max. 277 V
Nominal power	max. 30 W/ft
Nominal current	max. 40 A
Min. installation temperature	-76 °F (- 60 °C)
Max. operation temperature	+482 °F (+250 °C)

Ordering Information

Type	Item No.
EL-ECSH-Ex	09CA024