


At a Glance

Applications



- › ELSR-NA (Repair/Connection)
- › 3 x AWG 16

Benefits

- › Heat shrink technology
- › Simple and quick assembly


Approvals



- › Classification
 - Class I Div 2 Grp A,B,C,D
 - Class II Div 2 Grp E,F,G /
 - Class III Div 1
 - Zone1, AEx 60079-30-1 IIC Gb /
 - Ex 60079-30-1 IIC Gb
- › Certification
 - FM 22CA 0044X
 - FM 22US 0062X
 - CSA C US 2547790

EL-SPN 16

ELSR - Connection set

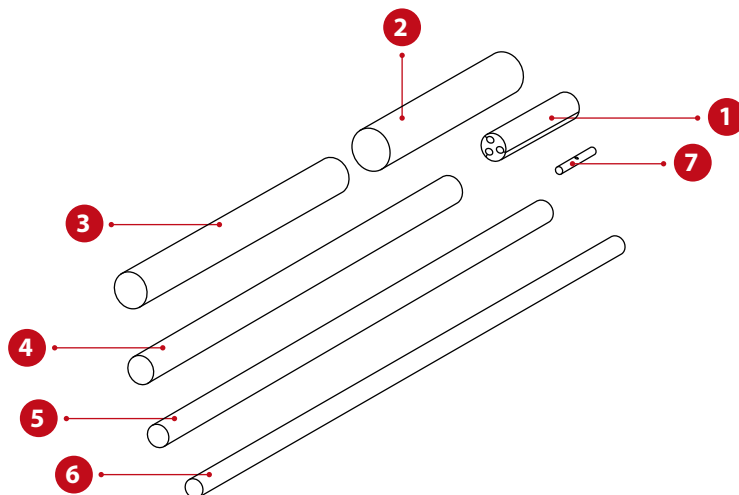

Checklist

No.	Type	Quantity
1	Spacer Ø = 0,71" (18 mm); 2,95" (75 mm) long, silicone	1 Pcs.
2	Heat shrink Ø = 0,75"/0,24"* (19/6 mm)*; 7.08" (180 mm) long; black	1 Pcs.
3	Heat shrink Ø = 0,47"/0,16"* (12/4 mm)*; 13.78" (350 mm) long; black	2 Pcs.
4	Heat shrink Ø = 3/8" (9.5 mm); 7.87" (200 mm) long; black	2 Pcs.
5	Heat shrink Ø = 3/16" (4.8 mm); 11.81" (300 mm) long; black	3 Pcs.
6	Heat shrink Ø = 1/8" (3.0 mm); 17.72" (450 mm) long; black	4 Pcs.
7	Butt connector Ø = 0.08" - 0.175" (2.03 - 4.45 mm); E-Cu, tin-plated	1 Pcs.

*Shrink behaviour of the heat shrink

Technical Information

Nominal voltage	max. 300 V
Nominal power	max. 10 W/ft
Nominal current	max. 15 A
Min. installation temperature	-13 °F (-25 °C)
Max. Operation temperature	+176 °F (+80 °C)

Ordering Information

Type	Item No.
EL-SPN 16	09CA033