


At a Glance

Applications



- › ELSR-NA
- › ELSR-HA
- › ELSR-SH+

Benefits

- › Cold connection technology
- › Simple and quick assembly


Approvals



- › Classification
 - Class I Div 1 Grp A,B,C,D
 - Class I Div 2 Grp A,B,C,D
 - Class II Div 1 Grp E,F,G /
 - Class III Div 1
 - Zone 1, A/Ex 60079-30-1 IIC Gb
- › Certification
 - FM 22CA 0044X
 - FM 24CA 0020X
 - FM 22US 0062X
 - FM 24US 0046X
 - CSA C US 2547790

EL-HAZELECT

ELSR - Connecton set

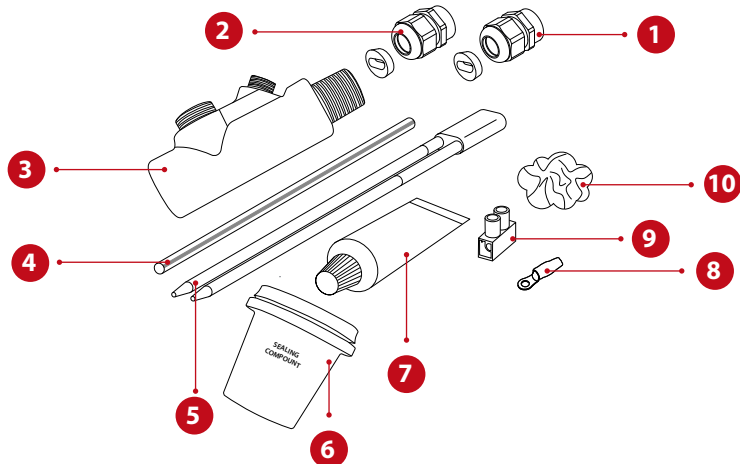

The Cold connection technology is the ideal solution for simple and quick connection of the ELSR heating cable to a suitable junction box.

Checklist

No.	Type	Quantity
1	Cable gland 3/4" NPT for ELSR-NA	1 Pcs.
2	Cable gland 3/4" NPT for ELSR-HA	1 Pcs.
3	Cable entry 3/4" NPT	1 Pcs.
4	Heat shrink Ø = 3/16" (4.8 mm); 6.30" (160 mm) long; green/yellow	1 Pcs.
5	Insulator for ELSR connection; silicone	1 Pcs.
6	Sealing compound; 4 oz.	1 Pcs.
7	Silicone glue; „EC“ blue, 5 gr.	1 Pcs.
8	Eyelet cable lug	1 Pcs.
9	Luster terminal AWG 16 to 8 (1 to 10 mm ²)	2 Pcs.
10	Packing fiber; 2 oz.	1 Pcs.

Technical Information

Nominal voltage	max. 277 V
Nominal power	max. 30 W/ft
Nominal current	max. 40 A
Min. installation temperature	+39,2 °F (+4 °C)
Max. operation temperature	+392 °F (+200 °C)

Ordering Information

Type	Item No.
EL-HAZELECT	09CA051