


At a Glance

Applications



- ELSR-NA
- ELSR-HA

Benefits

- Cold connection technology
- Simple and quick assembly


Approvals



- Classification
 - Class I Div 2 Grp A,B,C,D
 - Class II Div 2 Grp E,F,G T3...T6
 - Class III
 - Class I Zone I AEx/Ex e II
- Certification
 - CSA C US 2547790

ELVB-SREx-It-NA

ELSR - Connection set

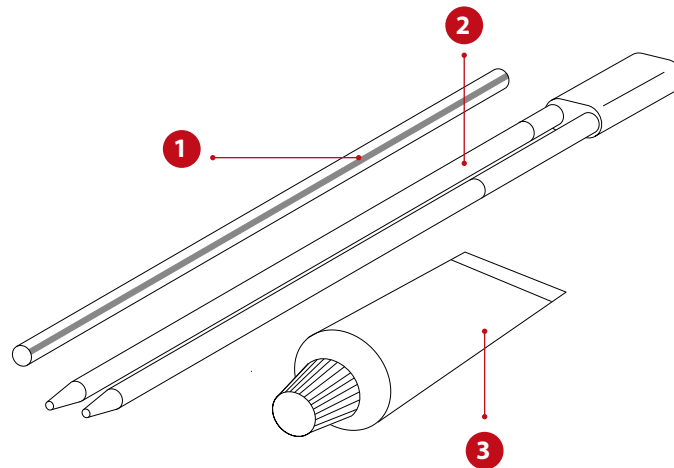

The Cold connection technology is the ideal solution for simple and quick connection of the ELSR heating cable to a suitable junction box.

Checklist

No.	Type	Quantity
1	Heat shrink Ø = 3/16" (4,8 mm), 7,08" (180 mm) long; green/yellow	1 Pcs.
2	Isolator for ELSR-Connection; Silicone	1 Pcs.
3	Silicone glue; „EC“ blue, 5 gr	1 Pcs.

Technical Information

Nominal voltage	max. 277 V
Nominal current	max. 40 A
Min. installation temperature	-49 °F (-45 °C)
Max. operation temperature	+392 °F (+200 °C)

Ordering Information

Type	Item No.
ELVB-SREx-It-NA	09CAITD