


At a Glance

Applications



› ELP/PFA

Benefits

- › Cold connection technology
- › Simple and quick assembly


Approvals



- › Classification
 - Zone 1 AEx 60079-30-1 IIC Gb / Ex 60079-30-1 IIC Gb
 - Zone 21 AEx 60079-30-1 IIC Db / Ex 60079-30-1 IIC Db
 - Class I Div 1 Grp A,B,C,D
 - Class I Div 2 Grp A,B,C,D
 - Class II Div 1 Grp E,F,G / Class III Div 1
- › Certification
 - DEKRA 24CAUS 40-144991

EL-ECP

ELP - End termination-Set

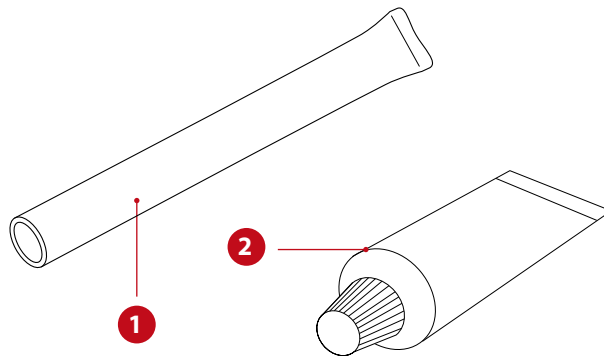

The End termination is the ideal complement to the eltherm Cold connection sets.

Checkliste

No.	Type	Quantity
1	Termination cap EL-ECP, Silicone, red	1 Pcs.
2	Silicone glue; „ECH“ red, 5 gr.	1 Pcs.

Technical Information

Nominal voltage	max. 600 V
Nominal power	max. 40 W/m
Nominal current	max. 40 A
Min. installation temperature	- 76 °F (- 60 °C)
Max. operating temperature	+ 482 °F (+ 250 °C)

Ordering Information

Type	Item No.
EL-ECP End termination-Set	09CA025