


At a Glance

Applications



› ELP/PFA

Benefits


- › Cold connection technology
- › Simple and quick assembly

Approvals



- › Classification
- › Certification
DEKRA 24CAUS 40-144991

ELVB-SRAP-3/4" ST ELP - Connection set

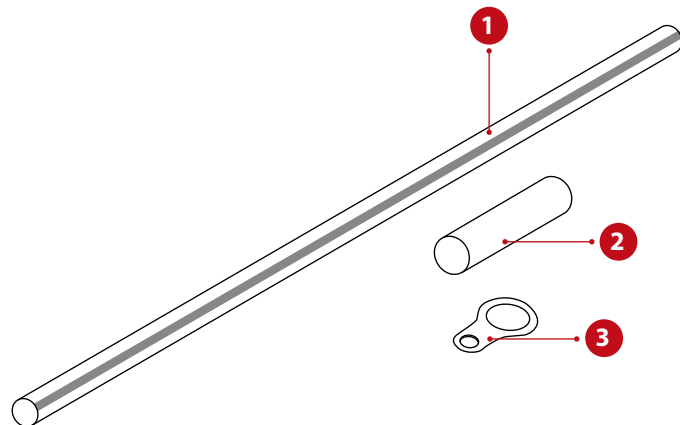

The Cold connection technology is the ideal solution for simple and quick connection of the ELP trace heater to a suitable junction box.

Checklist

No.	Type	Quantity
1	Heat shrink Ø = 3/16" (4.8 mm); 4.7" (120 mm) long; green/yellow	1 Pcs.
2	Silicone sleeve Ø 4 / 6 mm; 1.18" (30 mm) long	1 Pcs.
3	Earthing kit (optional)*	(1) pcs.

*The earthing kit is not included in the connection set and can be ordered separately.

Technical Information

Nominal voltage	max. 600 V
Nominal power	max. 40 W/m
Nominal current	max. 40 A
Min. installation temperature	- 49 °F (- 45 °C)
Max. operating temperature	+ 176 °F (+ 80 °C)

Ordering Information

Type	Item No.
ELVB-SRAP-3/4" ST Connection set	09CA075
Cable gland ¾" NPT, mat. brass; Ex db eb	409CA01301
Earthing kit for Cable gland 3/4"	091E021