


At a Glance

Applications



› ELKM-AG-NA

Benefits

- › Cold connection technology
- › Simple and quick assembly


Approvals



- › Classification
 - Zone 1 AEx db eb IIC Gb /
 - Ex db eb IIC Gb
 - Zone 21 AEx tb IIIC Db /
 - Ex tb IIIC Db
 - Class I Div 2 Grp A,B,C,D
 - Class II Div 2 Grp E,F,G
 - Class III
- › Certification
 - FM16CA0069X,
 - FM16US0124X

ELVB-NB 1/2

ELKM - Connection set

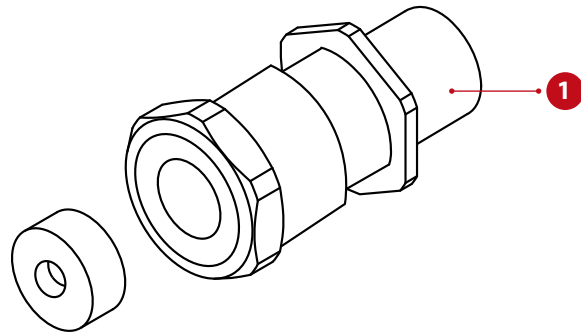

The ELVB-NB cold connection technology is the ideal solution for simple and quick connection of the ELKM trace heater to a suitable junction box in hazardous areas.

Checklist

No.	Type	Quantity
1	Cable gland 1/2" NPT, material: nickel-plated brass; Ex d e, clamping range; Ø0,126" to 0,315" (3,2 to 8mm)	2 Pcs.

Technical Information

Nominal voltage	max. 750 V
Nominal current	max. 40 A
Min. installation temperature	- 76 °F (- 60 °C)
Max. operating temperature	+ 212 °F (+ 100 °C)

Ordering Information

Type	Item No.
ELVB-NB 1/2 Connection set	09CAAG1